

Hydraulic Drilling Attachment



WOLF[®]

Excellence and Tradition in Rock Drilling

Since
1974

SONIC 3500

The **SONIC 3500**, drilling attachment is the premier option for rock drilling and has superior productivity compared to hydraulic or pneumatic track drill. The operator can drill using radio command control. This safety feature allows the operator to be either inside or outside the cabin depending on topography. In all matter of minutes, with minor adjustment, three distinct functions can be performed: Drilling, Demolition and excavation. Diesel consumption is also a greatly reduce. The **SONIC 35000**, is Productive, Safer, Versatile Cost Effective solution to your rock drilling needs.



ADVANTAGES

- » Reduced Maintenance Cost
- » Reduced Diesel Consumption**
- » Safer to Operate, Reducing risk to the Operator
- » Simple to Operate
- » Low Investment Cost
- » High Production
- » Multi-Function: Drilling, Excavating, Breaking

** Will Depend on the excavator size and brand

TECHNICAL FEATURES

- » Totally Hydraulic, requires just one operator
- » Drilling Diameter 2.1/2" to 4" (64 to 102 mm), with Top Hammer MW-80H
- » Interactive Digital Console to Monitor
- » Digital Inclinometer and Anti-Jamming (Optional)
- » Rod Changer, Rod Greaser, Hydraulic Centralizer
- » Dust Collector (Primary and Secondary)

ACCESSORIES (Optionals)



Radio Control

Optionals Available


Rod Changer (T38, T45 and T51)	Standard
Hydraulic Centralizer	Standard
Greaser Pump	Standard
Dust Collector (Primary and Secondary)	Standard
Radio Control	Standard
Hose Reel	Standard
Digital Inclinometer	Optional
Anti-Jamming	Optional
Water Tank (Water Mist) - 39 gal (150 l)	Optional
Nitrogen Charger	Optional
Diesel Compressor Frame	Optional
Hydraulic Driven Compressor	Optional

CE CERTIFICATED

Apply on equipment send to European Community (Optional)





TOP HAMMER MW-80H

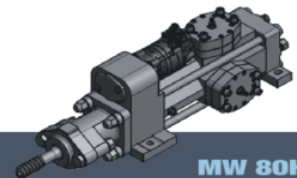

	MW 80H
Working Pressure	2,030 psi (140 bar)
Impact Power	19 Kw (26 hp)
Impact Frequency	2,600 bpm
Weight	520 lb (237 kg)
Rotation (RPM)	0-150 rpm
Rotation Torque	533 lbf/ft (750 nm)
Thread and Length - 12' (3,6 m)	T38, T45, T51
Drilling Diameter	2. 1/2" - 4"
Rod Changer Capacity (Carousel)	Carousel 6+1
Rod Length	10' or 12' (3 or 3,6 m)

TRANSPORT DIMENSION

- » Weight: 7,700 lb / 3,500 Kg
- » Length: 25,6 ft / 7,8 m
- » Width: 10 ft / 3 m
- » Height: 6,6 ft / 2 m

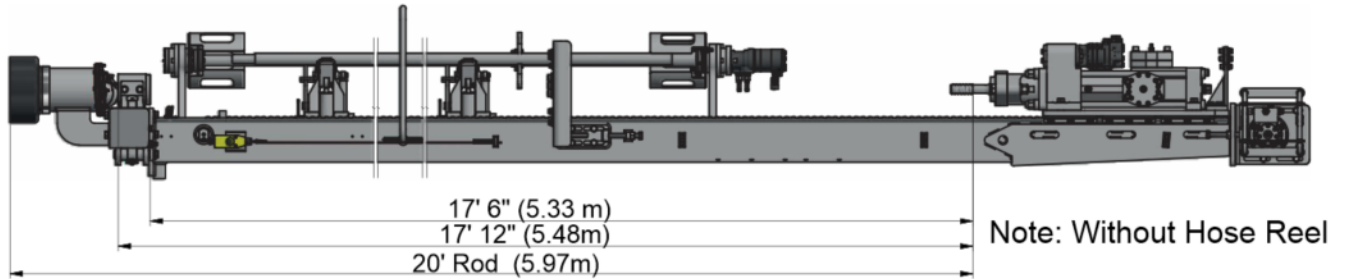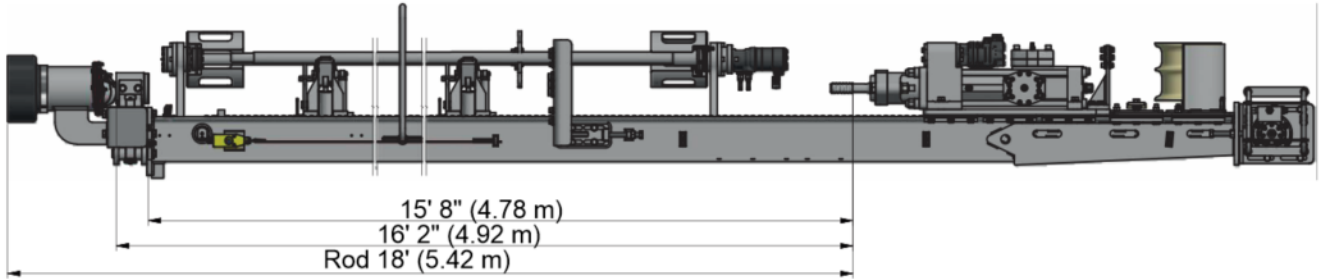

HEADQUARTER United States

WOLF Americas

@ info@wolfdrills.com

☎ +1 407 704 - 2051

FACTORY BRAZIL

Brazil / Indaiatuba-SP

@ info@wolf.com.br

☎ +55 (19) 3825 6530

FÝD= K7 TEMSİLCİSİ



DEMPO DIŞ TİCARET
LTD.ŞTİ.
Aksinne Mahallesi Karagöz Sk.
No:11/501
Meram / KONYA
Tel : 0332 351 01 44
dempo@dempogroup.com
www.dempogroup.com