

seppi m[®]

MULCHING EQUIPMENT SPECIALISTS

Flail Mulchers
SMW · SMO

Flail Mulchers

20-120 HP



SMWA s

30-90 HP Ø max. 5 cm [2 inch]

Reversible linkage and hydraulic side shift

Agriculture or greenspace maintenance? All easy ...
– the mulchers of the SMW series mulch grass, prunings and bushes up to 5 cm [2"] in diameter.

The SMWA s can be shifted to the right up to a maximum of 27 cm [10.6"]. The side shift is linear and works even while the machine is mowing, with hydraulic control from the tractor seat.

Standard version and characteristics

- > Mulches grass and brush up to 5 cm [2"]Ø
- > Working speed 3-10 km/h
- > 3 point linkage cat. 1&2 reversible
- > Linear hydraulic side shift 27 cm [10.6"]
- > 540 rpm gearbox with freewheel and through shaft
- > Belt transmission
- > Adjustable rear hood with rubber protection
- > Front protection with metal flaps
- > Support roller 152 mm Ø
- > Standard rotor with SMW flails

Optional configuration and accessories

- > Rotor with Y flails
- > 750 or 1000 rpm gearbox
- > Gearbox with automatic inverter and double freewheel
- > Additional 3-point linkage
- > Front attachment
- > Hood with rakes
- > Metal front wheels
- > Front protection with chains instead of metal flaps
- > Additional front rubber flap
- > Roller scraper



[YouTube www.youtube.com/seppimulcher](https://www.youtube.com/seppimulcher)

Tools



Flails
SMW




Flails
Y DUO

Specifications · SMWAs

		105 [41]	115 [45]	125 [49]	135 [53]	145 [57]	155 [61]	175 [69]	200 [79]
Working width	cm [inch]	105 [41]	115 [45]	125 [49]	135 [53]	145 [57]	155 [61]	175 [69]	200 [79]
Overall width	cm [inch]	117 [46]	127 [50]	137 [54]	147 [58]	157 [62]	167 [66]	187 [74]	212 [84]
Depth	cm [inch]	90 [35]	90 [35]	90 [35]	90 [35]	90 [35]	90 [35]	90 [35]	90 [35]
Height	cm [inch]	105 [41]	105 [41]	105 [41]	105 [41]	105 [41]	105 [41]	105 [41]	105 [41]
Weight (base value)	kg [lb]	360 [790]	380 [830]	390 [850]	420 [920]	440 [960]	455 [970]	505 [1110]	530 [1180]
Belts	qty	3	3	3	3	3	3	4	4
Flails	qty	9	12	12	12	15	15	18	21
Y flails	qty	18	21	24	24	27	27	33	39
Nominal tractor power	HP	30-65	30-65	30-65	30-65	30-65	30-65	40-90	40-90

SMWA s · features

Robust reinforced double wall chassis made of high tensile steel S420.

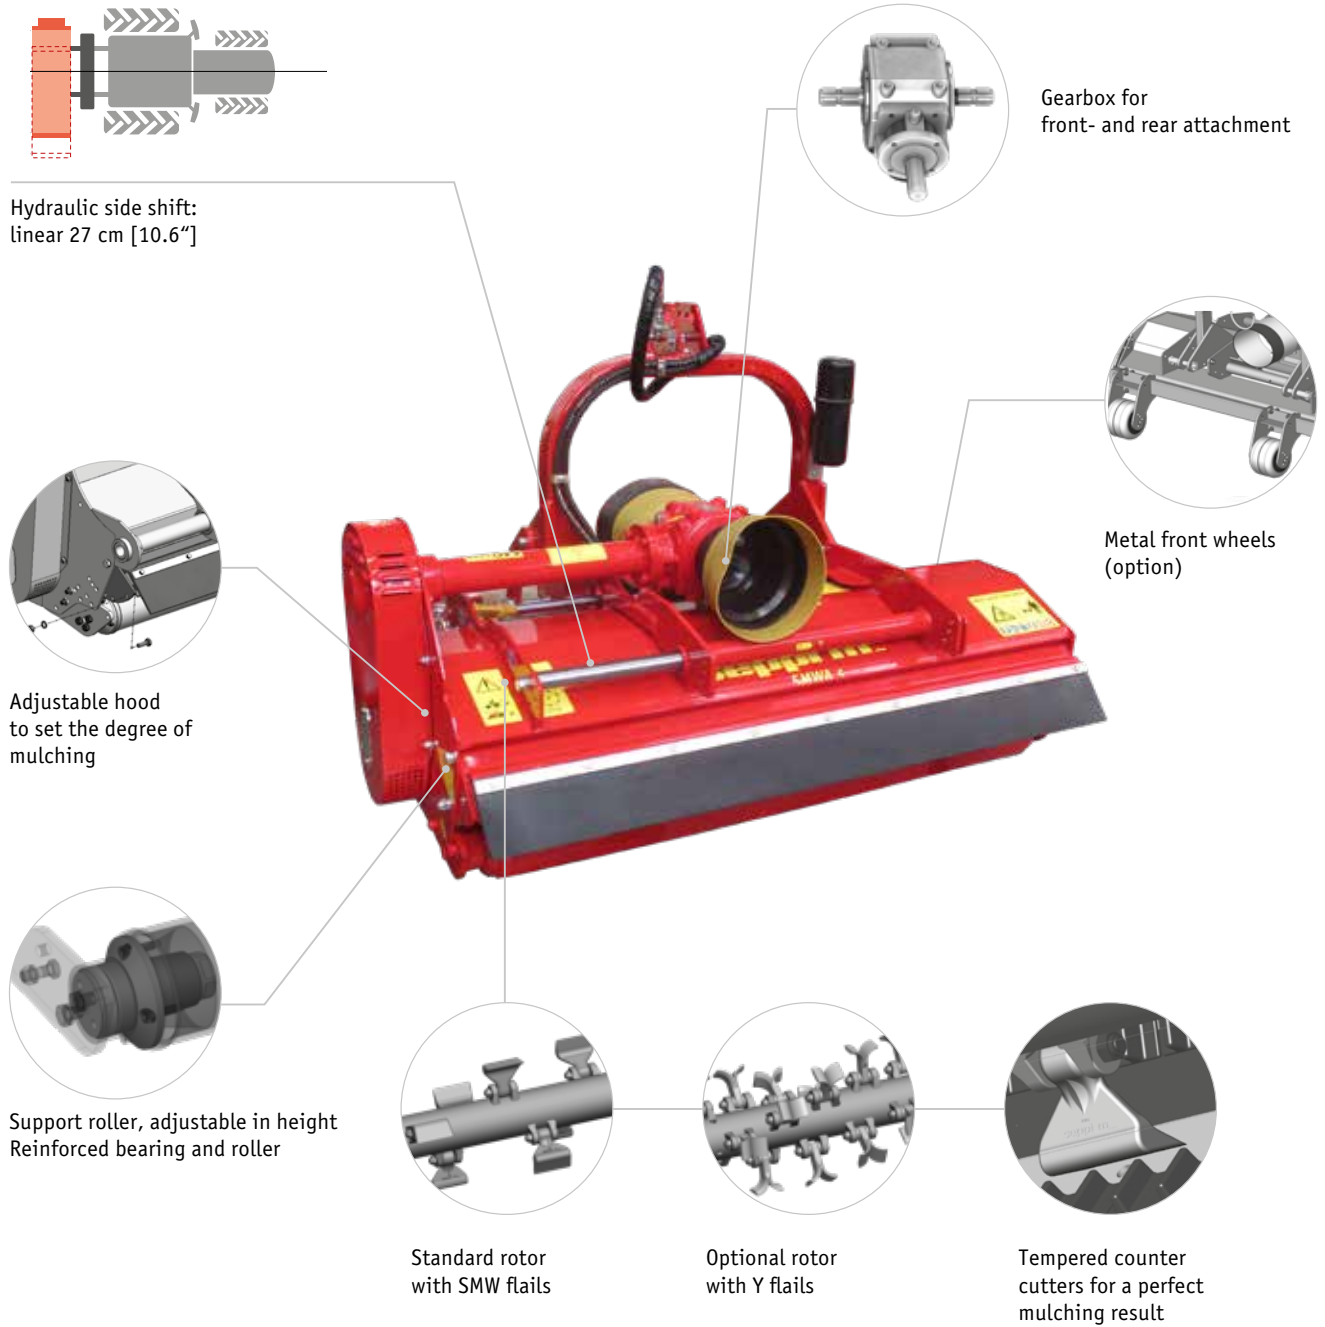

Hydraulic side shift:
linear 27 cm [10.6"]

Gearbox for
front- and rear attachment

Metal front wheels
(option)

Adjustable hood
to set the degree of
mulching

Support roller, adjustable in height
Reinforced bearing and roller

Standard rotor
with SMW flails

Optional rotor
with Y flails

Tempered counter
cutters for a perfect
mulching result