

seppi m[®]

MULCHING EQUIPMENT SPECIALISTS

Flail Mulchers
SMW · SMO

Flail Mulchers

20-120 HP



SMW0

30-90 HP Ø max. 5 cm [2 inch]

Mulcher with generous side shift

Agriculture or greenspace maintenance? All easy ...

– the mulchers of the SMW series mulch grass, prunings and bushes up to 5 cm [2"] in diameter.

The model SMW0 is distinguished by an extraordinarily wide side shift to the right. The parallel linkage system allows the machines to work under the trees and close to the crop leaving a much cleaner result.

Standard version and characteristics

- > Mulches grass and brush up to 5 cm [2"] Ø
- > Working speed 3-10 km/h
- > 3 point rear linkage cat. 1&2
- > Manual parallel linkage side shift
- > 540 rpm gearbox with freewheel and through shaft
- > Belt transmission
- > Adjustable rear hood with rubber protection
- > Front protection with metal flaps
- > Support roller 152 mm Ø
- > Standard rotor with SMW flails

Optional configuration and accessories

- > Rotor with Y flails
- > 1000 rpm gearbox
- > Reinforced transmission
- > Hydraulic side shift
- > Hood with rakes
- > Metal front wheels
- > Front protection with chains instead of metal flaps
- > Additional front rubber flap
- > Roller scraper
- > Attachments for undercanopy maintenance (details see separate brochure)



YouTube www.youtube.com/seppimulcher

Tools




Specifications · SMW0

Working width	cm [inch]	135 [53]	145 [57]	155 [61]	175 [69]	200 [79]
Overall width	cm [inch]	147 [58]	157 [62]	167 [66]	187 [74]	212 [83]
Depth	cm [inch]	120 [47]	120 [47]	120 [47]	120 [47]	120 [47]
Height	cm [inch]	95 [37]	95 [37]	95 [37]	95 [37]	95 [37]
Weight (base value)	kg [lb]	410 [900]	430 [940]	445 [980]	495 [1,090]	520 [1,140]
Belts	qty	3	3	3	4	4
Flails	qty	12	15	15	18	21
Y flails	qty	24	27	27	33	39
Nominal tractor power	HP	30-65	30-65	30-65	40-90	40-90


SMWO · features

Robust reinforced double wall chassis made of high tensile steel S420.

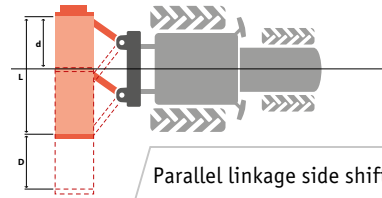


Parallel linkage side shift


L	d	D
135-150	73 cm [29"]	62 cm [24"]
155-200	82 cm [32"]	62 cm [24"]




Rake hood complete with rakes (option)




Adjustable hood to set the degree of mulching




Standard rotor with SMW flails



Optional rotor with Y flails



Tempered counter cutters for a perfect mulching result



Metal front wheels (option)

